

CNC-3832M – 8MP Motorized IR IP Weatherproof Camera



Features

- **8 Megapixel** 3840x2160 @20fps
- **H.265+** Compression
- **3.3~12mm Motorized** Zoom Lens
- **Auto Focus**
- DWDR, 3D-DNR, DSS, BLC, HLC, Defog, ROI, 3-stream etc
- 0 Lux up to 30m
- Simultaneous Login : 6 users
- POE / 12VDC Dual Power
- IP66
- 64ch CMS Software

8 Mega

H.265+



30m IR

Motorized Zoom

POE

IP66

SPECIFICATION

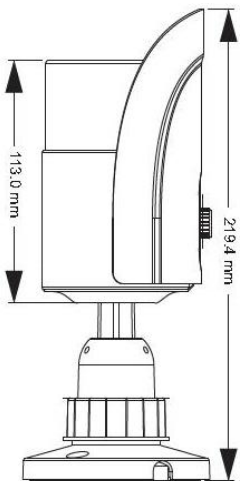

Model	CNC-3832-M
Image Sensor	1/2.7" progressive scan CMOS Sensor
Resolution	3840x2160@20fps 5MP / 4MP / 3MP / 2MP / 720p @25fps (PAL)
Shuttle	1/25s ~ 1/100,000s
Lens	M14 3.3-12mm Motorized Zoom Auto Focus
Viewing Angle	80°~38°
LEDs	2nos 850nm IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 30m (Subject to reflection)
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 10Mbps
Compression	3-Stream : H.265 / H.264 / MJPEG
Working Environment	-20° ~ +50°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, < 10W
Dimension	87mm(φ) x 220mm(L), 620g